


Specially Designed for Drilling FIBERGLASS PANELS and Boards.



FRP CORE BIT (CARBIDE TEETH)

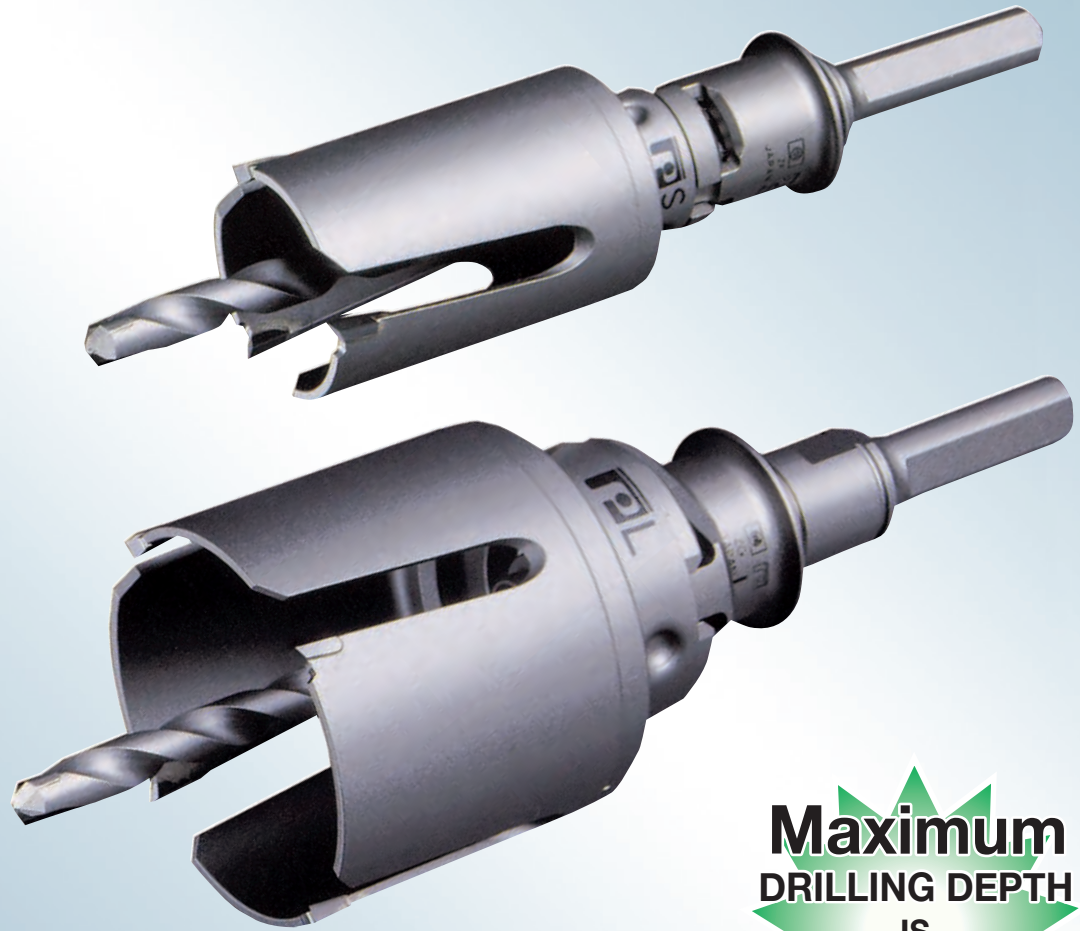

Maximum
DRILLING DEPTH
IS
1-3/4"!!

Characteristics

- Quick change system easily locks and unlocks cutter from shank.
- The only bit of its kind specially designed for drilling Fiberglass panels and boards.
- Carbide teeth for fast, burr-free cutting; highly resistant to over-heating, and at the same time does not require any coolant.

For use in

- Fiberglass, FRP, acrylic resin fiber, vinyl chloride, composite walling, wood.
- Drilling holes in wood (up to 2x) against concrete.

Specifications

- Dia. 25/32" (20mm) - 5" (127mm)
- Max. drilling depth: 1-3/4" (45mm)
- Long shank (8") available for deeper drilling.
- Shank dia : Poly-clic shank "S" / "L"
S shank : 25/32" (20mm) - 1-3/4" (45mm).
L shank : 2" (50mm) - 5" (127mm).

FRP CORE BIT (CARBIDE TEETH)



Size Table

Set & Cutter

The actual sizes are in metric.

Nominal dia.(Inch)	Nominal dia.(mm)	Set	Cutter
		Part-No.	Part-No.
25/32	20	PCFRP020	PCFRP020C
7/8	22	PCFRP022	PCFRP022C
1	25	PCFRP025	PCFRP025C
1-3/32	28	PCFRP028	PCFRP028C
1-1/8	29	PCFRP029	PCFRP029C
1-3/16	30	PCFRP030	PCFRP030C
1-1/4	32	PCFRP032	PCFRP032C
1-3/8	35	PCFRP035	PCFRP035C
1-1/2	38	PCFRP038	PCFRP038C
1-9/16	40	PCFRP040	PCFRP040C
1-3/4	45	PCFRP045	PCFRP045C
2	50	PCFRP050	PCFRP050C
2-1/8	55	PCFRP055	PCFRP055C
2-3/8	60	PCFRP060	PCFRP060C
2-9/16	65	PCFRP065	PCFRP065C
2-3/4	70	PCFRP070	PCFRP070C
2-7/8	75	PCFRP075	PCFRP075C
3-1/8	80	PCFRP080	PCFRP080C
3-1/2	90	PCFRP090	PCFRP090C
3-3/4	95	PCFRP095	PCFRP095C
3-7/8	100	PCFRP100	PCFRP100C
4-1/4	110	PCFRO110	PCFRO110C
4-1/2	115	PCFRP115	PCFRP115C
4-3/4	120	PCFRP120	PCFRP120C
5	127	PCFRP127	PCFRP127C

Shank

Poly-clic shank	Part No.	For use with
S shank	PCSKS	25/32" - 1-3/4" (20mm - 45mm)
S shank SDS	PCSKSR	
S shank 200L (8")	PCSKS200	
S shank SDS 200L (8")	PCSKSR200	
L shank	PCSKL	2" - 5" (50mm - 127mm)
L shank SDS	PCSKLR	
L shank 200L (8")	PCSKL200	
L shank SDS 200L (8")	PCSKLR200	
SDS-max Shank (Rotary mode)	PCSKLMXK	

Center Drill

Item	Part-No.
Center drill	PCFRPCDS
Center drill	PCFRPCDL

Recommended Drill Speed/ Wattage

Diameter inch (mm)	rpm	W
25/32 - 2 (20-50)	600 - 1300	over 500W
2-1/8 - 3-7/8 (55-100)	500 - 1000	over 600W
4-1/4 - 5 (110-127)	250 - 800	over 700W

MIYANAGA America Corp.

40 Shuman Blvd.Suite 328
Naperville, Illinois 60563 USA
Tel:(630)778-3496 Fax:(630)778-3509

MIYANAGA CO.,LTD

Registered office and Factory-Japan
Representative Office-Europe

ISO 9001/ISO14001 Certified

www.miyanagaamerica.com

