


Easy Drilling in Stainless Steel up to 9/64" (3.5mm) in Thickness or 10 GA.

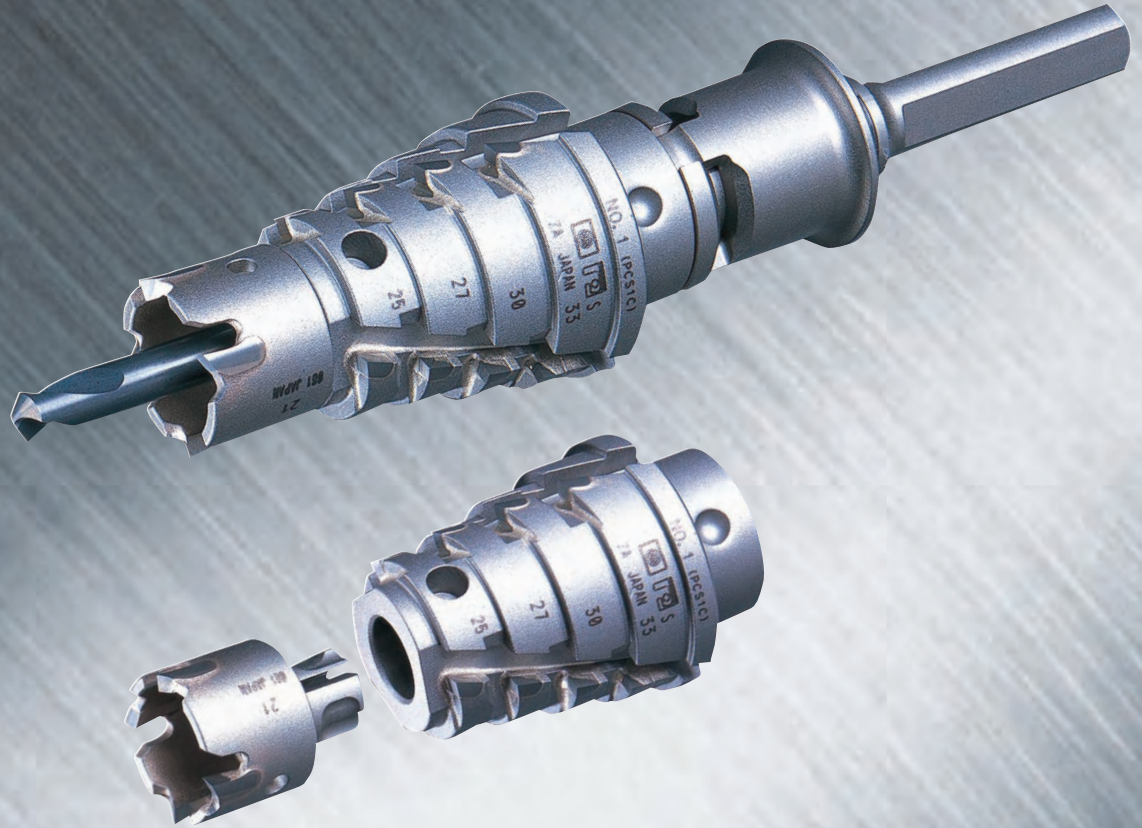

**Holes of 5 different diameters
can be drilled w/ one tool.**

Characteristics

- Quick change system easily locks and unlocks cutter from shank.
- **Safe** and **Easy** drilling with rotary mode only.
- Carbide provides more than 5 times the life of high speed steel.
- Special design ensures round burr-free holes.
- Incorporates a quick-change system for replacing cutters.

For use in

- Sheet metal, Stainless, Copper, Aluminum, up to 9/64" - 10GA.

Specifications

- Drilling depth : 9/64"(3.5mm)
- Shank dia : Poly-clic shank "S"

CARBIDE STEP DRILL

Size Table

Complete sets

The actual sizes are in metric.

Item	Nominal dia.(Inch)	Nominal dia.(mm)	Part-No.
No.1	13/16", 1", 1-1/16" 1-3/16", 1-9/32"	21, 25, 27 30, 33	PCS1
No.2	5/8", 11/16", 7/8" 1", 1-1/8"	16, 18, 22 25, 28	PCS2
No.3	7/8", 1", 1-1/8" 1-3/16", 1-5/16"	22, 25, 28 30, 34	PCS3

Replacement Tips (Holesaw part)

Item	Nominal dia.(Inch)	Nominal dia.(mm)	Part-No.
No.1	13/16"	21	PCSB21
No.2	5/8"	16	PCSB16
No.3	7/8"	22	PCSB22

Replacement Cutters

Item	Nominal dia.(Inch)	Nominal dia.(mm)	Part-No.
No.1	1", 1-1/16" 1-3/16", 1-9/32"	25, 27 30, 33	PCS1C
No.2	11/16", 7/8" 1", 1-1/8"	18, 22 25, 28	PCS2C
No.3	1", 1-1/8" 1-3/16", 1-5/16"	25, 28 30, 34	PCS3C

Shank

Poly-ctic shank	Part No.	For use with
S shank	PCSKS	5/8" - 7/8" (16mm - 22mm)
S shank SDS	PCSKSR	
S shank 200L (8")	PCSKS200	
S shank SDS 200L (8")	PCSKSR200	

Center Drill

Description	Part-No.
Center Drill	PCSCDS

Recommended RPM

Material	Iron	Stainless steel
Recommended RPM	Around 700 rpm	Around 500 rpm

 **MIYANAGA America Corp.**

40 Shuman Blvd.Suite 328
Naperville, Illinois 60563 USA
Tel:(630)778-3496 Fax:(630)778-3509

MIYANAGA CO.,LTD

Registered office and Factory-Japan
Representative Office-Europe

ISO 9001/ISO14001 Certified

www.miyanagaamerica.com

