


Quick Change Holesaw System

Quick • Easy • Safe



S-LOCK SERIES

HOLESAW 578

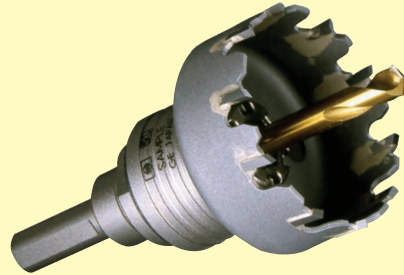


Characteristics

The carbide-tipped teeth permit drilling in work materials such as stainless steel.
The cutting depth can be set in consideration of safety.

For use in

Steel, stainless steel of up to 5/32" (4mm) thickness or 9 gauge sheet.
FRP, resin plates, etc.

HOLESAW 578P

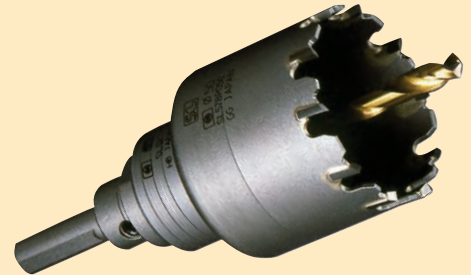

Characteristics

Excellent cutting performance for work materials such as steel plates, stainless steel plates, and metal pipes.

For use in

Steel, stainless steel of up to 4mm (5/32") thickness.
Metal pipe, etc.
FRP, resin plates, etc.

WOODING HOLESAW



Characteristics

Our original design of the cutting teeth permits safe cutting through nails.
Smooth removal of dust.

For use in

Nail embedded wood, FRP, PVC, and artificial marble.

DEEP BORE HOLESAW




Specially designed cutting teeth realize efficient removal of dust.

For use in

Steel, cast iron, stainless steel plates of up to 12mm (15/32") thickness.
Plastic and composite material of up to 35mm (1-3/8") thickness.

How to attach and detach the cutter

When attaching/detaching the cutter, ensure that S-LOCK shank is equipped with an electric drill.

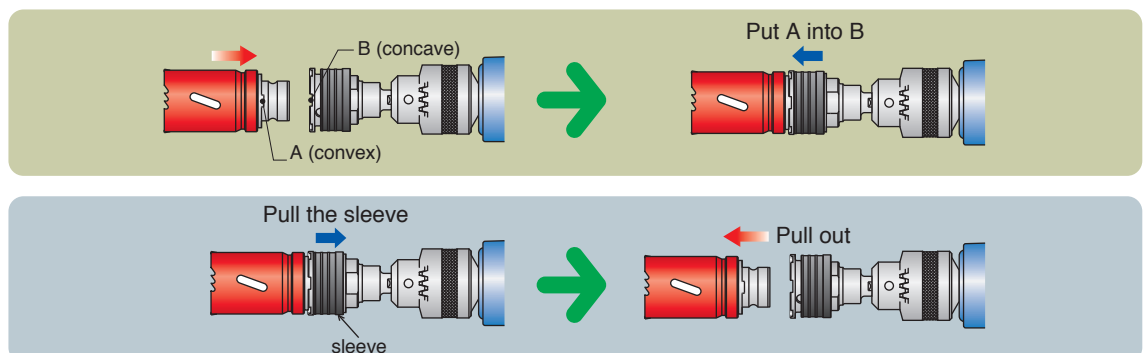

Size Table and Part Numbers

The actual sizes are in metric.

Metric	Inch	Holesaw 578 Item number	Holesaw 578P Item number	Wooding Holesaw Item number	Deep Bore Holesaw Item number
22	7/8"	SL578022	SL578P022	SLW022	SLF022
25	1"	SL578025	SL578P025	SLW025	SLF025
29	1-1/8"	SL578029	SL578P029	SLW029	SLF029
32	1-1/4"	SL578032	SL578P032	SLW032	SLF032
35	1-3/8"	SL578035	SL578P035	SLW035	SLF035
38	1-1/2"	SL578038	SL578P038	SLW038	SLF038
45	1-3/4"	SL578045	SL578P045	SLW045	SLF045
50	2"	SL578050	SL578P050	SLW050	SLF050
53	2-1/8"	SL578053	SL578P053	-	SLF053
65	2-9/16"	SL578065	SL578P065	SLW065	SLF065
Center Drill		SLCD80	SLCD	SLCD	SLCD
Shank (straight)		SLSK578U		SLSKU	
Shank (SDS Plus)		SLSKR578U		SLSKRU	
Shank (1/4 hex)		SLSKD578U		SLSKDU	

Kits


SL578-PK1	Holesaw 578 Plumber's Kit (7/8", 1-1/8", 1-1/2", 1-3/4", shank and center drill)
SL578-EK1	Holesaw 578 Electrician's Kit (7/8", 1-1/8", 1-3/8", 1-3/4", shank and center drill)
SL578-DK1	Holesaw 578 Metal Door Lock Installation Kit (1", 2-1/8", shank and center drill)
SLW-PK1	Wooding Holesaw Plumber's Kit (7/8", 1-1/8", 1-1/2", 1-3/4", shank and center drill)
SLW-EK1	Wooding Holesaw Electrician's Kit (7/8", 1-1/8", 1-3/8", 1-3/4", shank and center drill)
SLF-DK1	Deep Bore Holesaw metal & Wood Door Installation Kit (1", 2-1/8", shank and center drill)

Adaptors for Bi-metal Holesaw


SLADP30	Cutter Adaptor 30 for under 1-3/16"(30mm)
SLADP38	Cutter Adaptor 38 for 1-7/32"(31mm) - 2-9/16"(65mm)
SLADP130	Cutter Adaptor 130 for 2-19/32"(66mm) and up

Use the adaptors below to connect conventional bi-metal holesaw to S-Lock shanks.


Adapter 30
Size: for under 1-3/16"



Adapter 38
Size: for under 1-7/32" - 2-9/16"



Adapter 130
Size: for 2-19/32" and up

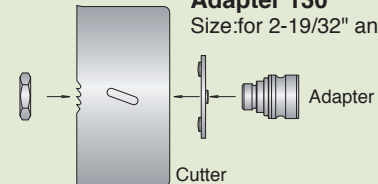

MIYANAGA America Corp.

40 Shuman Blvd. Suite 328
Naperville, Illinois 60563 USA
Tel: (630) 778-3496 Fax: (630) 778-3509

MIYANAGA CO., LTD

Registered office and Factory-Japan
Representative Office-Europe

ISO 9001/ISO14001 Certified

www.miyanagaamerica.com

